

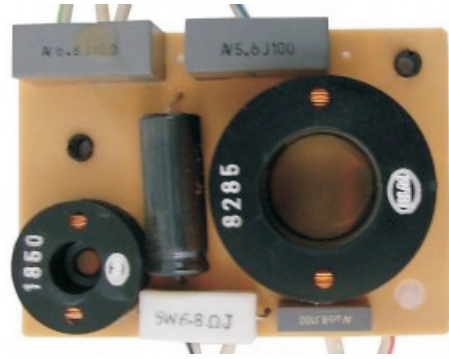



K61

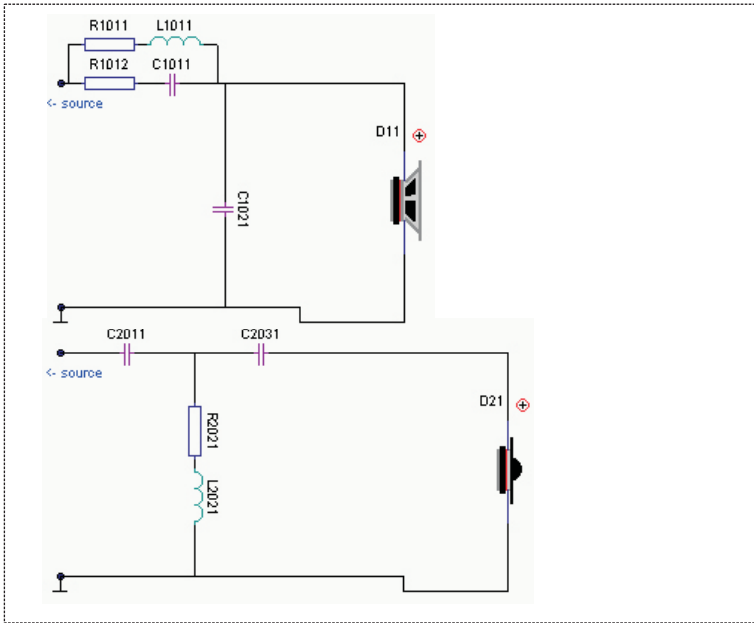

R1011	0.600 ohm	C2011	5.600 uF
R1012	6.80 ohm	R2021	0.200 ohm
C1011	0.670 uF	L2021	0.180 mH
L1011	0.820 mH	C2031	6.800 uF
C1021	8.000 uF		

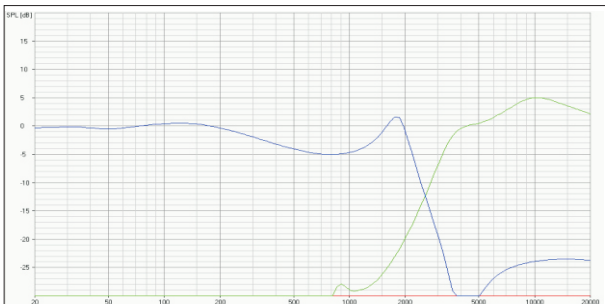

Net gain at standard speaker 0 dB = 2,83V
 160 mm woofer (80hm) Re: 6,2Ω Le: 1,2 mH
 25 mm tweeter (80hm) Re: 6,2Ω Le: 0,1 mH

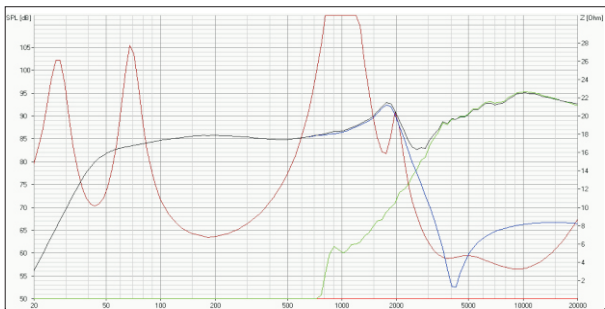


Summed frequency response at standard speaker 0 dB = 2,83V
 160 mm woofer (80hm) Re: 6,2Ω Le: 1,2 mH
 25 mm tweeter (80hm) Re: 6,2Ω Le: 0,1 mH

2 Wege Frequenzweiche für 8 Ohm

TMT : 12 dB/Okt
 HT : 18 dB/Okt
 HT_{gain} : 0 dB
 F_t : 2600 Hz
 P_{max} : 100 W

Frontbuffer

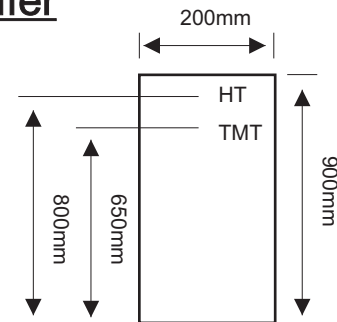

Anschluss (Kabelkennzeichnung)

Eingang (TMT)+	:Weis/Rot
Eingang (TMT)-	:Weis
Eingang (HT)+	:Weis/Blau
Eingang (HT)-	:Weis
Tiefmitteltöner +	:Weis/Schwarz
Tiefmitteltöner -	:Weis
Hochtöner +	:Weis/Grün
Hochtöner -	:Weis